


# STORAGE HOUSE XXL: FIBER POLE AND TIE DOWN DIAGRAM

INSERT THE FIBER POLES WITH RED STICKER TO THE FIBER POLES THAT HAS CONNECTORS WITH RED STICKERS

INSERT THE FIBER POLES WITH BLUE STICKER TO THE FIBERS POLE THAT HAS CONNECTORS WITH BLUE STICKERS

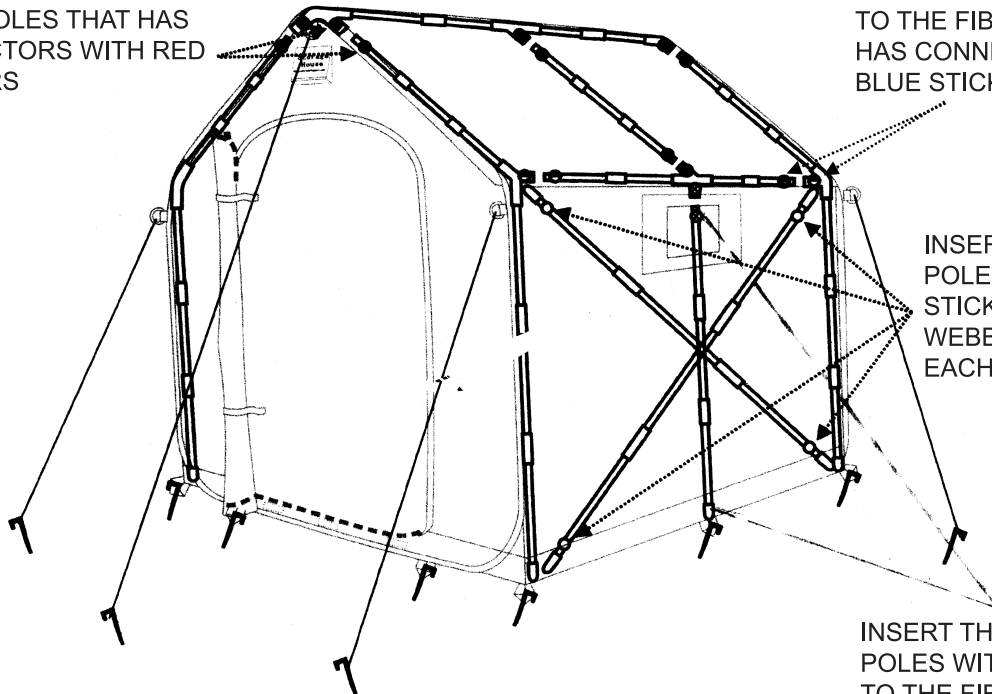

INSERT THE FIBER POLES WITH GREEN STICKERS TO THE GREEN WEBBING POCKETS ON EACH OF THE 2 SIDES

INSERT THE FIBER POLES WITH YELLOW STICKER TO THE FIBERS POLE THAT HAS CONNECTORS WITH YELLOW STICKERS

StorageHouses are portable storage sheds they set up like a tent , for longest life and best performance set up in a protected area , prefer shade , out of prevailing wind.

1. Completely unpack all contents of package and lay them out in an open well lit space
2. Please read instructions through and send in Warranty Registration for your product.
3. Close a flat well drained location to set your Storagehouse .
4. Unfold StorageHouse and unzip door zipper with floor on the ground
5. Assemble all fiber glass poles ( note the color sticker on the ends )  
( Helpful Hint - be sure all poles are completely nested into their connections )
6. Take the four longest poles that have the GREEN sticker on each end , they will form a X in each side wall.( Helpful Hint- these pole ends fit into webbing pockets be sure the corners of the shed are fully unfolded so pole pocket is available )
7. Then fit the two GREEN stickered shorter poles X frame in the back wall
8. Then install the peak pole with the RED stickers  
On the larger Storagehouses these are supported by the vertical, slightly L shaped poles with red stickers on one end that fit into the corners ( Helpful Hint carefully assemble all poles and put them in place before you Velcro any of them in place )
9. The next poles to assemble in the larger Storagehouses are the Horizontal Blue poles across top of the wall
10. The last poles to assemble is the short poles with the YELLOW stickers  
Tension in the poles is desired this will keep your Storagehouse sturdy in the weather .
11. Once Storagehouse is fully assembled confirm it is setting level in well drained area  
It is very important to secure with the supplied stakes and high wind tie downs .